


# Deck d'Ober,

Boat deck jointed wood panelling








**Bathroom**

# Deck d'Ober,


Boat deck jointed wood panelling



**Dressing room**

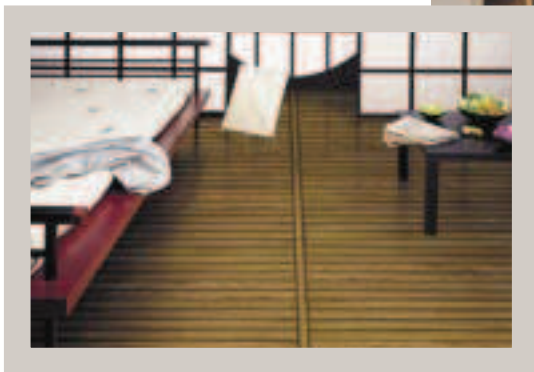


**Bedroom**






## Teak

Strips of 41 mm width  
Available in black or white joints



## Wenge



## Bubinga



## Doussie

Strips of 87 mm width • Available in black or white joints

## NOVELTIES




### Characteristics

STRIPS	<b>Species:</b> solid teak
41 mm WIDTH	(upon request: solid wenge, bubinga, doussie)
	<b>Standard lengths:</b> 1200 mm • 2000 mm (lengths on demand: 2200 mm • 2500 mm)
	<b>Standard widths:</b> 639 mm • 1283 mm
STRIPS	<b>Species:</b> solid wenge, bubinga, doussie
87 mm WIDTH	<b>Standard length:</b> 2000 mm (For a length narrower than 2000 mm, please consult us)
	<b>Standard widths:</b> 639 mm • 1283 mm
SURFACE CONDITION	Product delivered unfinished, to be oiled
THICKNESS OF A STRIP	7,5 mm
JOINT TYPE	elastomer mastic glue
WIDTH OF THE JOINT	5 mm

## Swimming pool



TEAK

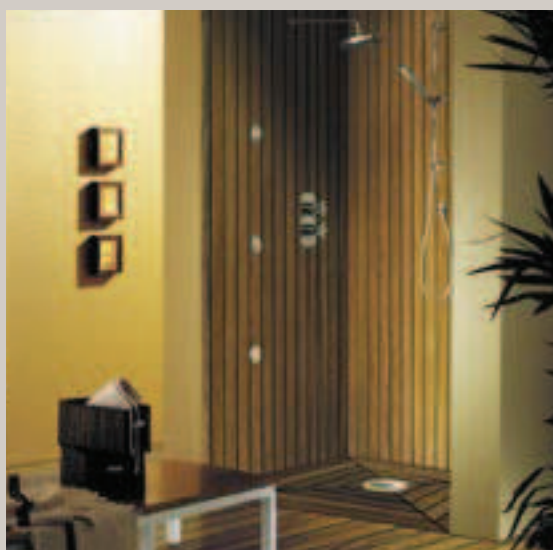

## Shower

### Additional products

**ACCESSORY STRIPS:** For the treatment of edges or making thresholds for doors, Oberflex can supply accessory strips in solid wood, length 2000 mm, width 41 or 87\*mm and thickness 7,5 mm.

#### GLUES / MASTICS :

Oberflex can supply glues and mastics for gluing Deck d'Ober and making the joints (see the technical sheet).

\* Teak not available in 87 mm strip

### Additional information

DECK D'OBBER panels begin with a strip of wood and end with another strip of wood.

Deck d'Ober panels manufactured with 41 mm width solid wood strips can be used for curved surfaces: rounded bathtub surrounds, cladding of columns... (bending radius: 400 mm).

For outside applications or in very humid environment we only recommend the use of Teak wood.



[www.oberflex.com](http://www.oberflex.com)

