




## EKOSOUND

Non perforated tiles


Perforated tiles with round perforations diameter 8 mm, CDA 16 mm

Perforated tiles with round perforations diameter 8 mm, CDA 32 mm



Reference	<b>EK A PL</b>	<b>EK B PL</b>	<b>EK A 816</b>	<b>EK B 816</b>	<b>EK A 832</b>	<b>EK B 832</b>
Dimension	594 x 594 mm	1194 x 594 mm	594 x 594 mm	1194 x 594 mm	594 x 594 mm	1194 x 594 mm
Perforation rate	-	-	18,90%		4,72%	
Average absorption coefficient ( $\alpha_w$ )	-	-	0,75		0,3	
Fire ratings	M1					
Finish	Matte					
Substrate - Thickness	16 mm particle board Total thickness : 18,6 mm					
Weight	600 x 600 mm = 4,5 kg / 1200 x 600 mm = 9 kg					

Type of installation and lateral machining for the Ekosound tiles

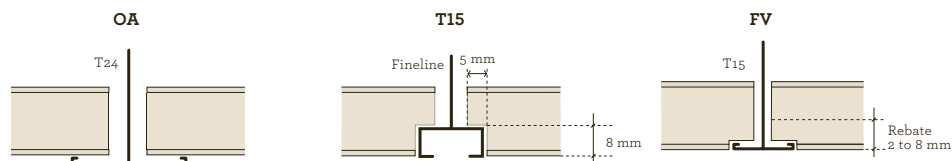

## THE RESISTANCE OF THE OBERFLEX FINISH



Abrasion resistance



Impact resistance



Scratch resistance



Light resistance



No attack by common-type products



Cigarette burning resistance



Can be cleaned with soapy water



Fire resistance